

CS-CV228-A0-3C2WFR

C4W 1080P Outdoor Smart Wi-Fi Camera

Introduction



EZVIZ products have been designed for your entertainment, communication and security. When you install the EZVIZ APP on your smartphone or tablet, EZVIZ devices will be connected to the cloud via their QR code and will immediately be online. With EZVIZ you can talk to your loved ones, watch your child's progress when you are away, keep an eye on your home, interact with your four-legged friends and prevent household accidents.

Main Features

H.265

H.265 Video Technology



Motion Detection



Two-way Talk



Dustproof and Waterproof IP67



Active Defense with Siren and Strobe light



User Defined Alarm Tones




Wi-Fi 2.4GHz
Built-in Dual Wi-Fi Antennas



MicroSD Slot for Local Storage
(Up to 256GB)

Dimension

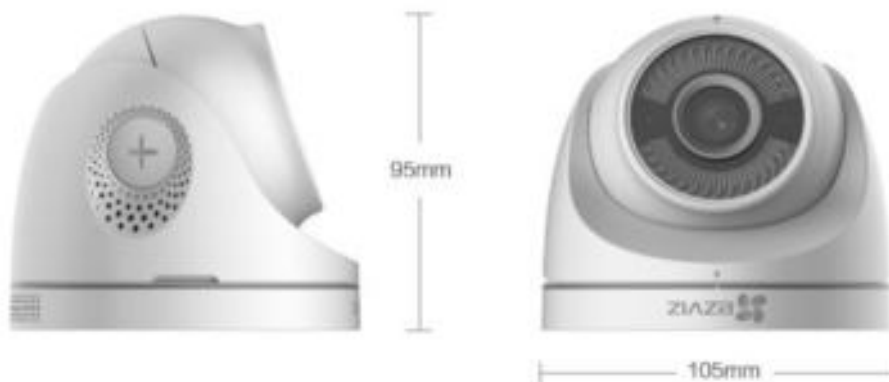

Specifications

Model	CS-CV228-A0-3C2WFR
Camera	
Image sensor	1/2. 7" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	2.8mm, view angle: 103° (Horizontal), 118°(Diagonal) 4mm, view angle: 87° (Horizontal), 104°(Diagonal)
Lens Mount	M12
Day & Night	IR-cut filter with auto-switching
DNR	3D DNR
WDR	Digital WDR
Compression	
Video Compression	H.264/H.265
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive bit rate.
Image	
Max. Resolution	1920 × 1080
Frame Rate	Max: 30fps; Self-Adaptive during network transmission
Network	
Smart Alarm	Motion detection, Active sound and light alarm
User Defined Alarm Tone	Supports
Wi-Fi Pairing	AP paring
Protocol	EZVIZ cloud proprietary protocol
Interface Protocol	EZVIZ cloud proprietary protocol
Interface	
Storage	Micro SD card slot (Max. 256G)
Wired Network	RJ45 X 1 (10M/100M self-adaptive Ethernet port)
Wi-Fi	
Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g :54Mbps, 11n :144Mbps
General	
Operating Conditions	-30°C to 60°C (-22°F to 140 °F), Humidity 95% or less (non-condensing)
Power Supply	DC 12V/1A
Power Consumption	6W max
IR Range	MAX. 30 meters(98.43ft)
IP Grade	IP 67
Dimensions	Max Diameter: 105mm(4.13"); Height: 95mm(3.74")
Packaging Dimensions	147mm x 145mm x 173mm (5.79" x 5.71" x 6.81")
Bare Weight	330g(0.73lb)