

KIT/201S/372S



Features

OEU-201S-HMK-W

- Metal casing.
- Supports call and intercom with the connected indoor station and app.
- Supports security protection alarm and tamper alarm triggered by door magnet, infrared, etc.
- Supports Wi-Fi.
- Built-in IC card reader.

OEI-372S-H-W

- ABS casing and glass panel, solid and durable.
- Supports Wi-Fi.
- Supports touchscreen operation.
- 1024 x 600 HD screen.
- Supports remote door opening by sending signal to the door station.
- Allows to view live video of connected door stations and network cameras.

Kit Components

*OEU-201S-HMK-W x1

*OEI-372S-H-W x1

*Power adapter

Specifications


Model	KIT/201S/372S
Kit dimensions (LxWxH)	268mm*213mm*180mm
Kit weight	1.855kg

Model	OEU-201S-HMK-W
Power supply	DC12V ±25%, PoE power supply
Card capacity	10000
Operating system	Linux
Illuminator	IR light (adaptive)
WDR	Support
FOV	Horizontal: 124.3° Vertical: 67.5° Diagonal: 147.2°
Power consumption	< 10W
Volume adjustment	Support
Audio quality	Noise reduction, echo cancellation, auto gain control
Audio input	Built-in mic
Audio output	Built-in speaker
Protocol	Uniview private protocol
Audio compression format	PCM, G711, MP3
Audio compression bit rate	128kbps
Button	Call button
Ingress protection	IP65 (Apply waterproof glue to the gap between the device and the wall. See the corresponding quick guide for details.) IK08
Weight	0.267kg
Mount method	Wall mount, flush mount
Interface	Power supply*1, network interface*1, RS485*1, door lock interface*2, IO input*4
Communication mode	100Mbps network interface, supports IEEE802.3af; Wi-Fi
Dimensions (LxHxW)	79mm*171mm*34mm
Operating environment	- 30°C to 60°C, 10% to 90% RH noncondensing, outdoor
Model	OEI-372S-H-W
Power supply	DC12V ±25%, PoE power supply
Screen resolution	1024 x 600
Display screen	7-inch ultra-thin TFT LCD touch screen
Operating system	Linux
Audio quality	Noise reduction, echo cancellation, auto gain control
Audio input	Built-in mic
Audio output	Built-in speaker
Audio compression format	MP3, G711
Audio compression bit rate	128kbps
Protocol	Uniview private protocol
TF card	1 x 32G TF card, capable of storing 100 live video snapshots, 200 call records and call snapshots.
Power consumption	< 10W


Weight	0.377kg
Interface	Power supply*1, network interface*1, RS485*1, IO output*2, IO input*8, TF card slot*1
Communication mode	100Mbps network interface, supports IEEE802.3af; Wi-Fi
Dimensions (LxHxW)	193.2mm*143.4mm*25mm
Operating environment	- 10°C to 55°C, 10% to 90% RH noncondensing, indoor


Dimensions

OEU-201S-HMK-W

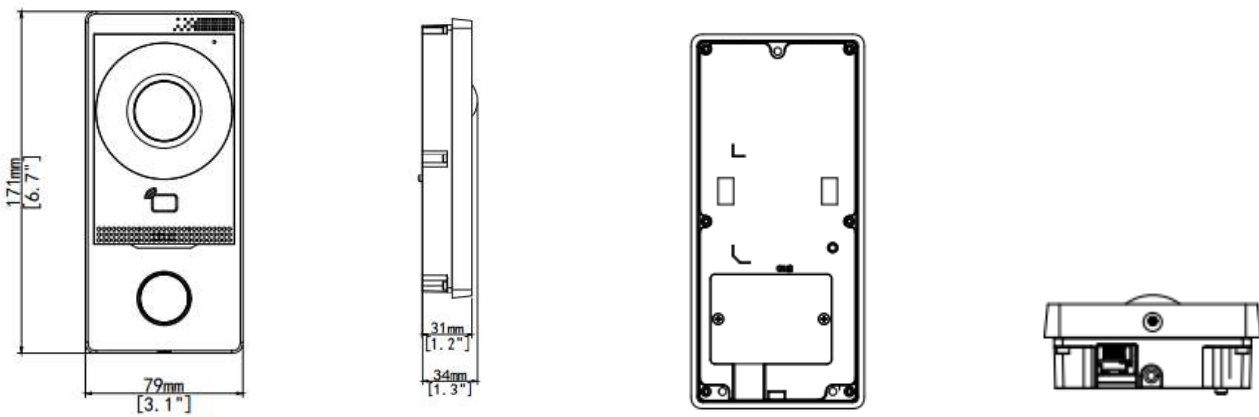

OEI-372S-H-W

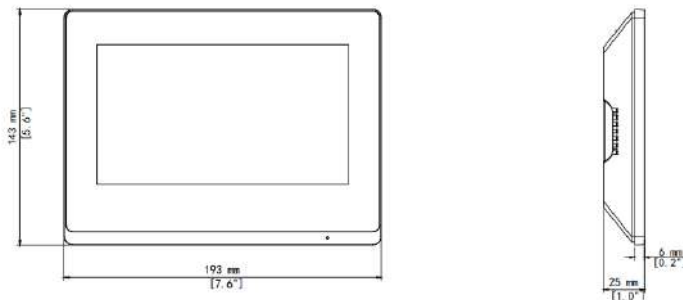

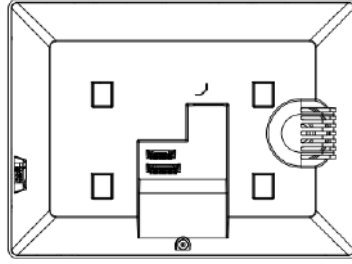**Zhejiang Uniview Technologies Co., Ltd.**

Xietong Street No. 369, Binjiang District, Hangzhou, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.