

## DS-2CE71H0T-PIRLO 5 MP PIR Camera



### Key Feature

- 5 MP, 2560 × 1944 resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart IR, up to 20 m IR distance
- PIR detection, strobe light alarm, alarm out
- IP67




## Specification

| <b>Camera</b>           |                                                                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor            | 5 MP CMOS                                                                                                                                            |
| Signal System           | PAL/NTSC                                                                                                                                             |
| Frame Rate              | TVI: 5 MP@20fps, 4 MP@25fps, 4 MP@30fps, 1080P@25fps, 1080P@30fps                                                                                    |
| Resolution              | 2560 (H) × 1944 (V)                                                                                                                                  |
| Min. Illumination       | 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR                                                                                                             |
| Shutter Time            | PAL: 1/20 s to 1/50,000 s<br>NTSC: 1/20 s to 1/50,000 s                                                                                              |
| Lens                    | 2.8 mm, 3.6 mm fixed lens                                                                                                                            |
| Field of View           | 2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.8°, diagonal FOV: 110.7°<br>3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.8°, diagonal FOV: 105.9° |
| Lens Mount              | M12                                                                                                                                                  |
| Strobe Light Alarm      | Yes                                                                                                                                                  |
| Day & Night             | ICR                                                                                                                                                  |
| WDR                     | Digital WDR                                                                                                                                          |
| Angle Adjustment        | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°                                                                                                 |
| <b>Menu</b>             |                                                                                                                                                      |
| White Light             | AUTO/OFF                                                                                                                                             |
| Image Mode              | STD/HIGH-SAT                                                                                                                                         |
| AGC                     | Yes                                                                                                                                                  |
| Day/Night Mode          | Auto/Color/BW (Black and White)                                                                                                                      |
| White Balance           | Auto/Manual                                                                                                                                          |
| AE (Auto Exposure) Mode | DWDR/BLC/HLC/Global                                                                                                                                  |
| Noise Reduction         | 2D DNR                                                                                                                                               |
| Language                | English                                                                                                                                              |
| Functions               | Brightness, Sharpness, Mirror, Smart IR                                                                                                              |
| <b>Interface</b>        |                                                                                                                                                      |
| Video Output            | 1 HD analog output                                                                                                                                   |
| Alarm                   | 1 alarm out                                                                                                                                          |
| <b>General</b>          |                                                                                                                                                      |
| Operating Conditions    | -40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensing)                                                                           |
| Power Supply            | 12 VDC ± 25%                                                                                                                                         |
| Power Consumption       | Max. 3.5 W                                                                                                                                           |
| Ingress Protection      | IP67                                                                                                                                                 |
| Material                | Enclosure: Plastic<br>Main body: Metal                                                                                                               |
| IR Range                | Up to 20 m                                                                                                                                           |
| PIR Angle and Range     | Angle: 110°, Range: 11 m                                                                                                                             |
| White Light Range       | Up to 20 m                                                                                                                                           |
| Communication           | HIKVISION-C                                                                                                                                          |
| Dimensions              | Φ 109.8 mm × 89.75 mm (Φ 4.32" × 3.53")                                                                                                              |
| Weight                  | Approx. 327 g (0.72 lb.)                                                                                                                             |

## Order Model

DS-2CE71H0T-PIRLO

## Dimension

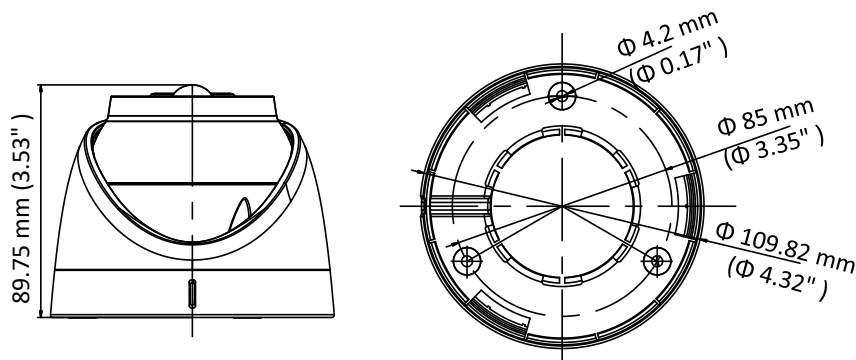


## Accessory




DS-1272ZJ-110-TRS

Wall Mount




DS-1275ZJ-SUS

Vertical Pole Mount




DS-1276ZJ-SUS

Corner Mount




DS-1280ZJ-S

Junction Box



DS-1281ZJ-S

Inclined Ceiling Mount



DS-1280ZJ-TR13

Junction Box

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-800-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28489900  
sales@pramathikvision.com

**Hikvision Canada**  
T +1-888-203-8890  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9049  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-5902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
lutam.support@hikvision.com

**Hikvision Turkey**  
T +90 1216521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7852-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (11) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-130-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikla.pantlov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6884-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-689-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-9031-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com