

## DS-7200HUI-K2 SERIES TURBO HD DVR

### Key Feature

- H.265 Pro+/H.265 Pro/H.265 video compression
- HDTVI/AHD/CVI/TVBS/IP video input
- Audio via coaxial cable
- Up to 8/16/32-ch IP camera inputs (up to 8 MP)
- Max. 800 m for 1080p and 1200 m for 720p HDTVI signal transmission
- Up to 10 TB capacity per HDD



### Compression and Recording

- H.265 Pro+ can be enabled to improve encoding efficiency and reduce data storage costs
- Recording at up to 8 MP lite resolution

### Storage and Playback

- 2 SATA interfaces
- Smart search for efficient playback
- Support the third party cloud storage

### Smart Function

- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Support line crossing detection and intrusion detection of all channels, and 2-ch sudden scene change detection

### Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Max. 32/64/128 Mbps incoming bandwidth and output bandwidth limit configurable



## Specification


Model	DS-7204HUHI-K2	DS-7208HUHI-K2	DS-7216HUHI-K2
Perimeter Protection <sup>1</sup>			
Line Crossing Detection/Intrusion Detection	2-ch	2-ch	2-ch
	Enhanced VCA mode on: 4-ch	Enhanced VCA mode on: 8- ch	Enhanced VCA mode on: 16-ch
Recording			
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264		
Encoding resolution	When 8 MP Lite mode is not enabled: 8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF When 8 MP Lite mode is enabled: 8 MP Lite/5 MP/4 MP/3MP/1080P/720P/WD1/4CIF/VGA/CIF		
Frame rate	Main stream: When 8 MP Lite mode is not enabled: 8 MP@8 fps/5MP@12 fps/3K@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) <b>*: 8 MP@8 fps is only available for channel 1 of DS-7204HUHI-K2.</b> When 8 MP Lite mode is enabled: 8 MP Lite/5 MP@12 fps/4 MP/3MP/1080P/720P/WD1/4CIF/VGA/CIF@15 fps <b>*: 8 MP Lite is only available for DS-7204HUHI-K2.</b>		
	Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)		
Video bit rate	32 Kbps to 10 Mbps		
Dual stream	Support		
Stream type	Video, Video & Audio		
Audio compression	G.711u		
Audio bit rate	64 Kbps		
Video and Audio			
IP video input <sup>2</sup>	2-ch (up to 6-ch)	4-ch (up to 12-ch)	8-ch (up to 24-ch)
	Enhanced IP mode on: 4-ch (up to 8-ch), each up to 4 Mbps	Enhanced IP mode on: 8-ch (up to 16-ch), each up to 4 Mbps	Enhanced IP mode on: 16-ch (up to 32-ch), each up to 4 Mbps
	Up to 8 MP resolution		
	Support H.265+/H.265/H.264+/H.264 IP cameras		
Analog video input	4-ch	8-ch	16-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
HDTVI input	8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25		
AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30		
HDCVI input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30		
CVBS input	PAL/NTSC		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz,		

	1024 × 768/60Hz		
HDMI output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)		
	4-ch via coaxial cable	8-ch via coaxial cable	16-ch via coaxial cable
Audio output	1-ch, RCA (Linear, 1 KΩ)		
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)		
Synchronous playback	4-ch	8-ch	16-ch
Network			
Total bandwidth	96 Mbps	128 Mbps	
Incoming bandwidth (Enhanced IP mode)	Up to 32 Mbps	Up to 64 Mbps	Up to 128 Mbps
Remote connection	32	64	128
Network protocol	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface	
Auxiliary interface			
SATA	2 SATA interfaces		
Capacity	Up to 10 TB capacity for each disk		
Serial interface	RS-485 (half-duplex)		
USB interface	2 × USB 2.0	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0	
Alarm in/out	4/1	8/4	16/4
General			
Power supply	12 VDC, 3.33 A		12 VDC, 5 A
Consumption (without HDD)	≤ 10 W	≤ 20 W	≤ 25 W
Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)		
Working humidity	10% to 90%		
Dimension (W × D × H)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)		
Weight (without HDD)	≤ 1.16 kg (2.6 lb)	≤ 1.78 kg (3.9 lb)	≤ 2 kg (4.4 lb)

**Note:**

- 1: Enabling enhanced VCA mode will maximize the connectable channel number for perimeter protection (line crossing detection and intrusion detection), but disable 2K/4K HDMI output resolution and 4 MP/5 MP/8 MP signal input.
- 2: Enhanced IP mode might be conflicted with smart events (perimeter protection) or other functions, please refer to the user manual for details.

## Physical Interface

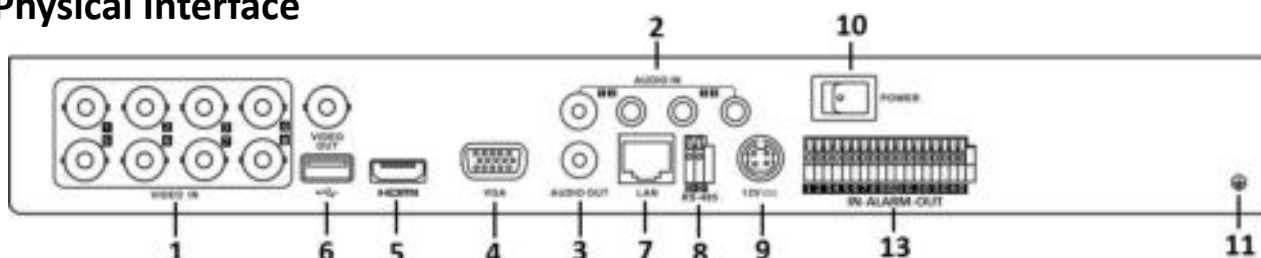

\*: The rear panel of DS-7204/7216HUHI-K2 provides 4/16 video input interfaces.

No.	Description	No.	Description
1	Video and Coaxial Audio In	8	RS-485 Serial Interface
2	AUDIO IN, RCA Connector	9	12 VDC Power Input
3	AUDIO OUT, RCA Connector	10	Power Switch
4	VGA Interface	11	GND
5	HDMI Interface	12	VIDEO OUT
6	USB Interface	13	Alarm In/Out
7	LAN Network Interface		

## Available Model

DS-7204HUHI-K2, DS-7208HUHI-K2, DS-7216HUHI-K2

Distributed by

# HIKVISION

**Headquarters**  
No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-800-855-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469800  
sales@pramshikvision.com

**Hikvision Canada**  
T +1-888-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216) 521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.pantilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432080  
salesmea@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
salesru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com