

## DS-KAD7060EY 2-wire HD Distributor



- Excellent Product Design: 8 interface indicators show device status, 1 Reset button
- Excellent Product Design: DIN rail installation
- IN/ OUT: Support DS-KAD7060EY cascade, or connection to DS-KAD7060EY-S for network communication between multiple buildings
- Support access to door stations, indoor stations and 7061 simultaneous transmission of power and network signals on 2 wires


## ▪ Specification

Device interfaces	
Two-wire interface	8("IN""OUT" for casacading, CH1-CH6 for Door station and Indoor station)
Power indicator	1
Signal indicator	8
Reset	1
Power supply input	48VDC
General	
Power supply	48 VDC
Installation	DIN rail installation
Power consumption	CH1 to CH2 < 15 W; CH3+CH4+CH5+CH6 < 110 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (W × H × D)	143.7 mm × 92.4 mm × 65.9 mm (5.66" × 3.64" × 2.59")

## ▪ Available Model

DS-KAD7060EY

## ▪ Dimension

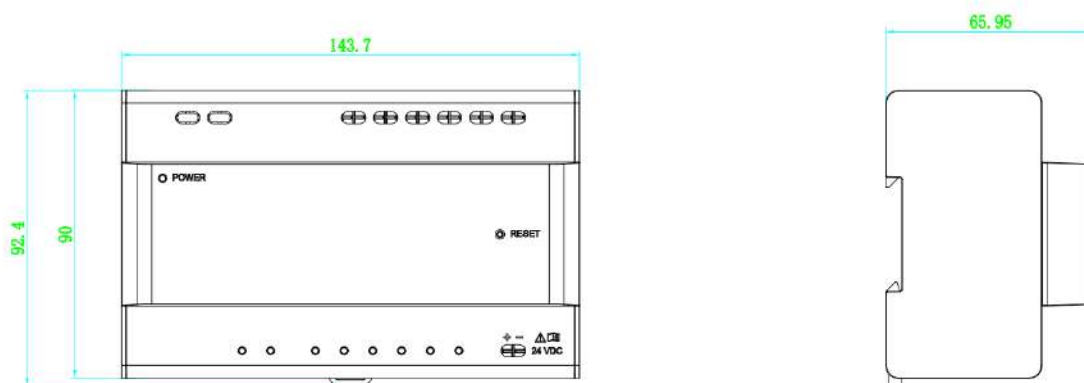

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq