

AC750 Wi-Fi Travel Router

Fast Wi-Fi Travels with You










Highlights


Quick Mode Selection

To meet the wireless needs of almost any situation you might encounter, the TL-WR902AC features Router, Hotspot, Range Extender, Client and Access Point Modes.

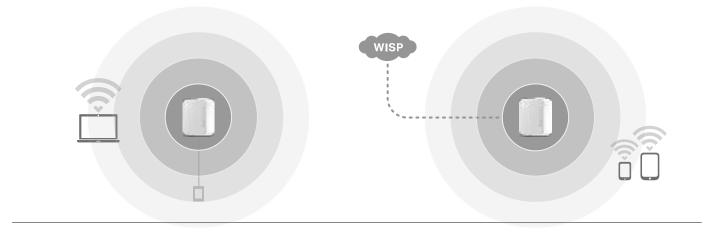

Router Mode or Access Point Mode

Hotspot Mode

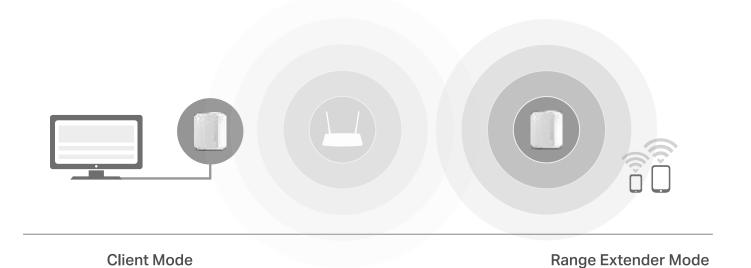

During Travel

- Router Mode: create your own private Wi-Fi network via Ethernet or 3G/4G modem*
- * 3G/4G modem is only supported in some regions.
- Hotspot Mode: turn existing Wi-Fi into a private wireless network

At Home

- Access Point Mode: connect Wi-Fi devices to any wired network
- Range Extender Mode: expand an existing router's Wi-Fi coverage
- Client Mode: connect Ethernet devices to a Wi-Fi network

Features







Reliability

- · Ultimate Wireless Speed Combined wireless speeds up to 300Mbps over 2.4GHz and 433Mbps over 5GHz
- · Support 802.11 ac Provides a data transfer rate 3 times faster than 802.11n for each stream
- · Easy Bandwidth Management Bandwidth Control allocates necessary speed of each connected device to ensure quality of multimedia streaming

Ease of Use

- · Intuitive Web UI Ensures quick and simple Installation without hassle
- · Fast Encryption One-touch WPA wireless security encryption with the WPS button
- · Hassle-free Management with Tether App Network management is made easy with the TP-Link Tether App, available on any Android and iOS device
- · USB 2.0 Port for Fast Sharing A USB 2.0 port makes it easy to share photos, videos, and music across your home network. Through the router's FTP server, you can also access your files and media from network devices remotely

Security

- Guest Network Keeps your main network secure by creating a separate network for friends and visitors
- · Access Control Establishes a whitelist or blacklist to allow or restrict certain devices to access the internet
- · Parental Controls Restricts internet access time and contents for children devices
- Encryptions for Secure Network WPA-PSK and WPA2-PSK encryptions provide active protection against security threats

Specifications

Hardware

- · Ports: 1 10/100Mbps WAN/LAN Port, 1 USB 2.0 Port, 1 mini USB Port
- · Buttons: WPS Button, Reset Button, Mode Switch
- · Antennas: Internal Antennas
- · External Power Supply: 5V/2A
- · Dimensions (W x D x H): 2.9×2.64×0.87 in. (74×67×22mm)



Wireless

- · Wireless Standards: IEEE 802.11ac/n/a 5GHz, IEEE 802.11b/g/n 2.4GHz
- · Frequency: 2.4GHz and 5GHz
- · Signal Rate: 300Mbps at 2.4GHz, 433Mbps at 5GHz
- · Transmit Power: < 20dBm (2.4GHz), <23dBm (5GHz)
- · Reception Sensitivity:

2.4GHz:

11g 54M: -76dBm

11n HT20 MCS7: -74dBm

11n HT40 MCS7: -71dBm

5GHz:

11a 54M: -76dBm

11ac VHT20 MCS8: -70dBm

11ac VHT40 MCS9: -65dBm

11ac VHT80 MCS9: -61.5dBm

- · Wireless Function: Enable/Disable Wireless Radio, WMM, Wireless Statistics
- · Wireless Security: 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK encryptions

Specifications

Software

- · Quality of Service: WMM, Bandwidth Control
- · WAN Type: Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)
- · Management: Access Control, Local Management, Remote Management
- · DHCP: Server, DHCP Client List, Address Reservation
- · Port Forwarding: Virtual Server, Port Triggering, UPnP, DMZ
- · Dynamic DNS: DynDns, NO-IP
- Access Control: Parental Controls, Local Management Control, Host List, White List, Black List
- · Firewall Security: DoS, SPI Firewall, IP and MAC Address Binding
- · Protocols: IPv4, IPv6
- · Guest Network: 2.4GHz guest network, 5GHz guest network



For more information, please visit

https://www.tp-link.com/products/details/TL-WR902.htm

or scan the QR code left

Attention: This device may only be used indoors in all EU member states and EFTA countries.

*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless coverage are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

Others

· Certification:

FCC, CE, RoHS

· System Requirements:

Microsoft Windows 98SE/NT/2000/XP/Vista™/7/8/8.1/10, MAC OS, NetWare, UNIX or Linux

Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser

· Environment:

Operating Temperature: 0°C~40°C (32°F~104°F)

Storage Temperature: -40°C~70°C (-40°F~158°F)

Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

Package Contents

AC750 Wi-Fi Travel Router TL-WR902AC

Power Supply Unit

Ethernet Cable

USB Cable

Quick Installation Guide

Wi-Fi Info Card