


## SF/UTP Category 6 Cables

Content of Data Sheet				
Product model	CAB-LC3200A-IN			
Product specification	HSYV-6 4x2x0.585			
Test Standard	ISO/IEC11801、TIA-568-C.2、YD/T1019			
Conductor	Material	OFC(Oxygen free copper)		
	AWG	23		
	Nom.O.D.(mm)	0.585±0.05 mm		
	DC resistance	≤65.8 Ω/km		
Insulation	Material	HDPE		
	Thickness	0.2±0.02 mm		
	Diameter	1.16±0.05 mm		
	Color	Blue/White- Blue		Green/White-Green
Orange/White-Orange		Brown/White-Brown		
Pitch	Offset pitch	≤20 mm		
	Cable pitch	≤120 mm		
Sheath	Material	PVC(complies RoHS/REACH)		
	External O.D.	7.6±0.4 mm		
	Color	Blue		
	Tensile strength	>13.5 Mpa		
	Thickness	0.6±0.05 mm		
Surface Printing	Letter height	3.0±0.3 mm		
	Color	Black		
	Print error & Space	1±0.005 m		
	Case number	Yes		
Packing	Wooden shaft			

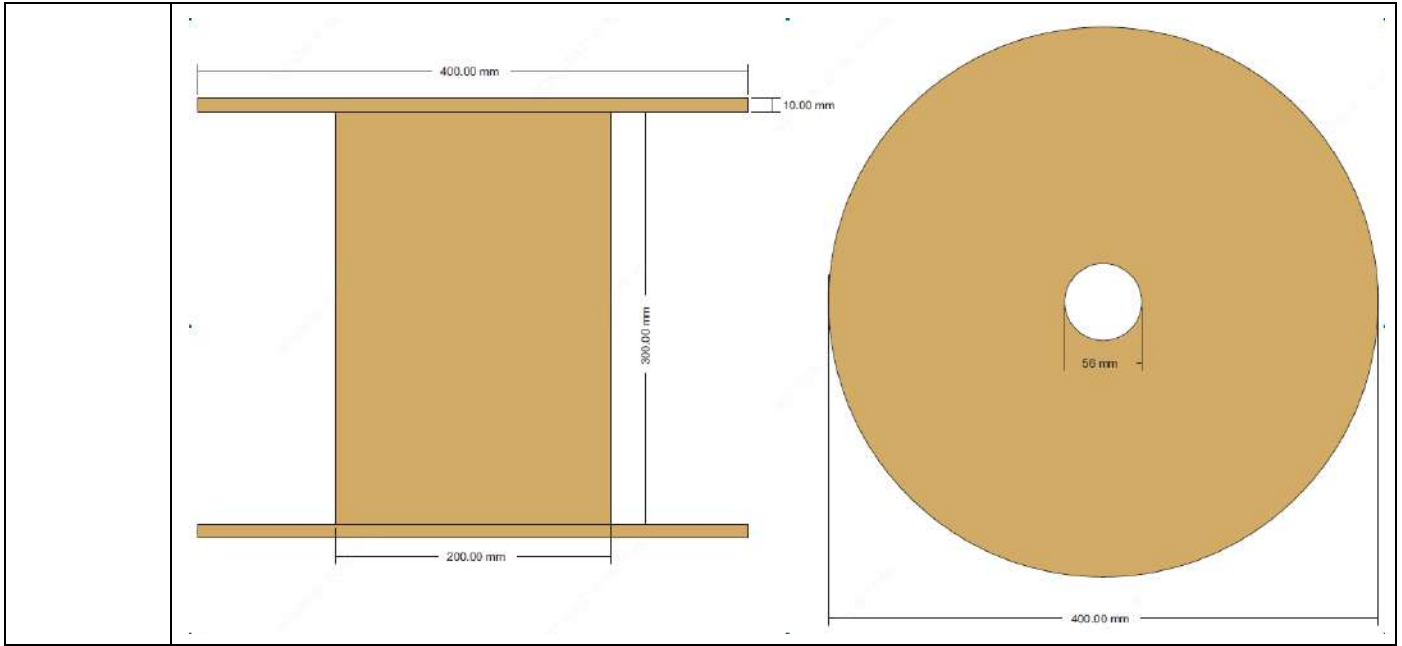

Packing length	305±1m		
Rip-cord	Yes	Crossing backbone	Yes
Ambient temperature	-20°C ~ 60°C		

**Zhejiang Uniview Technologies Co.,Ltd.**

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

 Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)
<http://www.uniview.com>

©2011-2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.