

# 24" LED FHD Monitor

MT-24-L



## Key Features


- True color display and perfect color reproduction
- Wide viewing angle:178°(H)/ 178°(V)
- No color shift from any view angle
- Specific menu design, which is simple to operate
- Support 7\*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language
- High fidelity digital processing for a brilliant and vivid video
- Professional thermal design to extend equipment lifespan
- Screen can reduce blue light, protect eyes
- Without ripple, use smooth dimming with DC to eliminate screen flicker
- Three sides super slim design, min width can be 2.8mm
- High light transmittance, uniform brightness, rich color, wide color gamut

## Specifications


Model	MT-24-L
Display	
Display Type	LED Backlight

Screen Size	23.8"
Aspect Ratio	16:9
Pixel Pitch(mm)	0.275× 0.275
Max Resolution	1920×1080
Brightness(cd/m <sup>2</sup> )	250
Contrast	1000:1
Response Time(ms)	14
Color	16.7M
Viewing Angle	Horizontal 178°, Vertical 178°
Refresh Rate	60Hz
<b>Interface</b>	
Input	VGA ×1,HDMI×1
<b>OSD</b>	
Multi-Language	8 (English, France, Spanish, German, Russia, Korea, Japanese, Simplified Chinese )
<b>Mounting</b>	
VESA	75mm x 75mm
<b>General</b>	
Power Supply	DC 12V,2A
Consumption	<23 W(on) <0.5 W(Standby)
Operation Temperature	0°C ~ 40 °C/32°F~104°F
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-10°C ~50°C /14°F~122°F
Storage Humidity	10%~90% (No Condensation)
Dimension (W×H×D)	541.43mm × 407.27 mm × 210.00mm(With Pedestal)
Package(W×H×D)	602mm × 394mm × 111mm
Weight	Net Weight:3.3Kg Gross Weight:4.2Kg
<b>Accessory</b>	
Standard	HDMI Cable, Adapter, Pedestal, Quick Guide
Optional	Hanging Bracket(Model: HB-4022-A)

## Dimensions

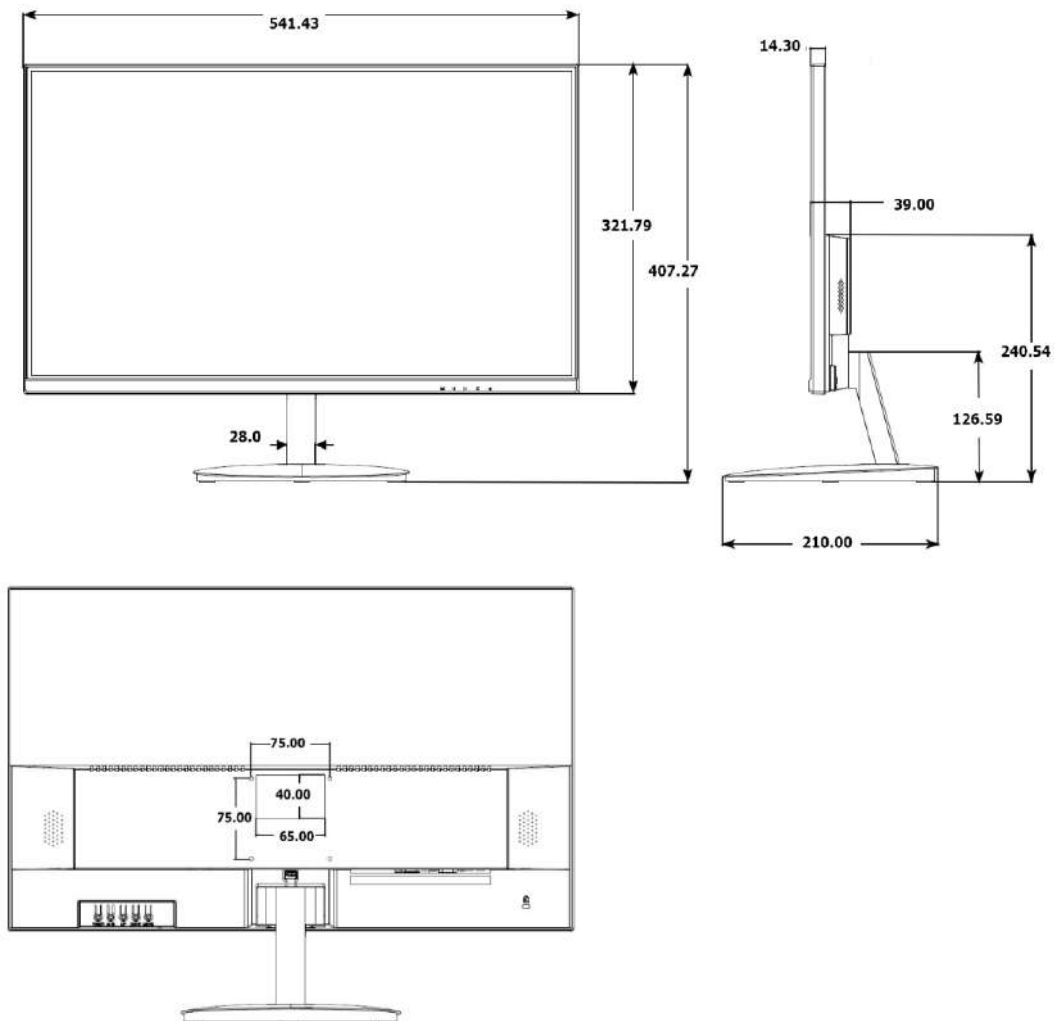

## Interfaces

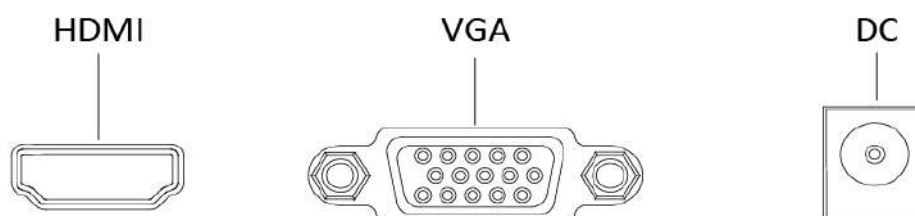

[www.uniview.com/uniarch](http://www.uniview.com/uniarch)

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.