

DS-D5022FC-B 22-inch Monitor



- LED backlit technology with full HD 1920 × 1080.
- Image processing: 3D comb filter, 3D de-interlace, 3D noise reduction.
- Multiple interfaces: HDMI, VGA, BNC, USB, and AUDIO IN.
- Built-in speaker.
- Wide viewing angle: Horizontal 170°, Vertical 160°.
- 7 × 24 hours working mode.



▪ Specification

	Model	DS-D5022FC-B
Display	Screen Size	21.5"
	Active Display Area	476.64 mm (H) × 268.11 mm (V)
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.24825 mm
	Brightness	250 cd/m ²
	Viewing Angle	170° / 160°
	Color Depth	8 bit
	Contrast Ratio	1000:1
	Response Time	5 ms
	Refresh Rate	60 Hz
	Haze	2 %, Anti-Glare, 3H (Non-Haze)
	Reliability	7 × 24 H
	Color Gamut	72%
Interface	Video & Audio Input	HDMI × 1, VGA × 1, BNC × 1, AUDIO IN × 1
	Video & Audio Output	8 Ω 2 W × 2
	Data Transmission Interface	USB 2.0 × 1
	Control Interface	NA
Power	Power Supply	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 24 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 80% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	20% to 80% RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	75 mm × 75 mm, 4-M6 × 6 screw holes
	Bezel Width	19.06 mm (top/left/right), 30.87 mm (bottom)
	Product Dimensions (W × H × D)	516.75 (W) mm × 320.03 (H) mm × 45.55 (D) mm (19.95" × 10.50" × 1.49")
	Package Dimensions (W × H × D)	641 (W) mm × 457 (H) mm × 154 (D) mm (21.03" × 14.99" × 5.05")
	Net Weight	3.1 ± 0.5 kg (6.83 ± 1.1 lb.)
	Gross Weight	4.4 ± 0.5 kg (9.7 ± 1.1 lb.)
	Packing List	Power cable × 1, HDMI 1.5 m × 1, user manual × 1, remote control × 1
Remarks	*The base is included by default. *The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information.	

▪ Available Model


DS-D5022FC-B

▪ Physical Interface



Interface	Description	Interface	Description
VGA	VGA signal input interface	HDMI	HDMI signal input interface
BNC	CVBS signal input interface	USB	USB 2.0 input interface
AUDIO	Audio input interface	100-240~	AC power supply

Dimension

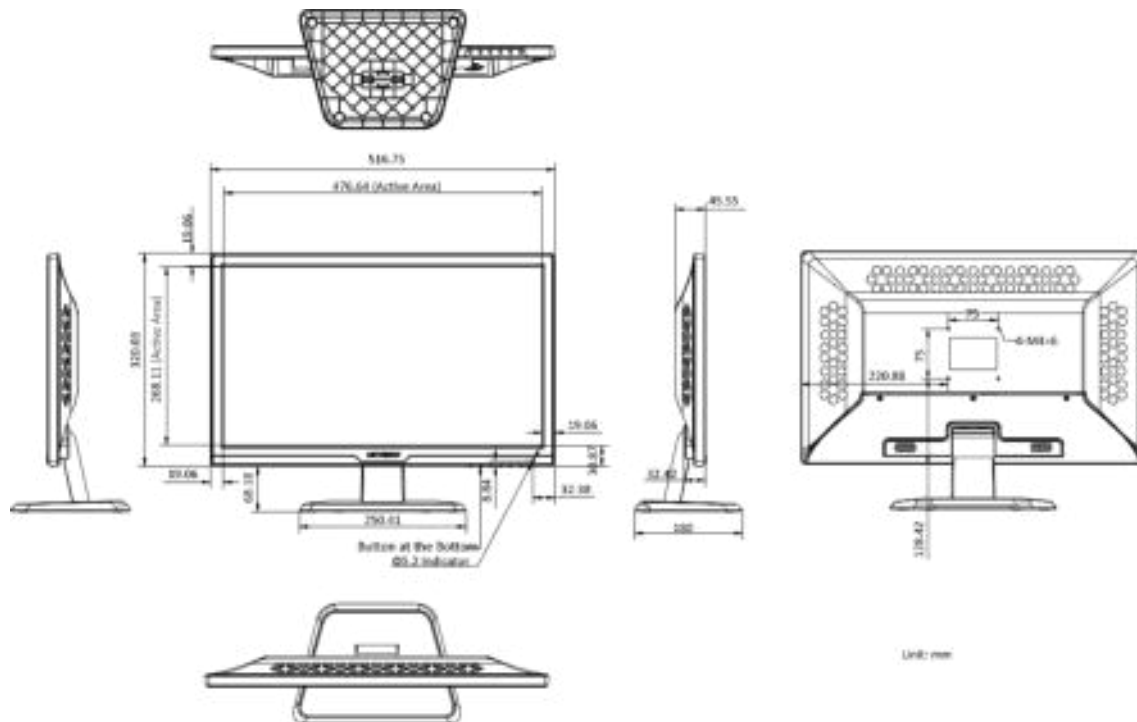

Distributed by

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-29469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6600
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 216521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7852-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (0) 0351172
sale.africa@hikvision.com

Hikvision France
T +3301-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-9684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
urb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1701
info.hk@hikvision.com

Hikvision Russia
T +7-495-869-67-99
saleru@hikvision.com

Hikvision Korea
T +82-0131-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com