

# **Smart Chime**

## **EZVIZ Video Doorbell Companion**

### Enjoy the doorbell tone of your choice!

As your EZVIZ video doorbell companion, the chime allows you to get instant notification when the visitor comes, virtually protecting your home. Plus, choose the pleasant ringtones to color your life.





Built-in Speaker



Multiple Notification





100V - 240V AC



MINI) Compact Design









### Hear the classic tone throughout your home.

As a complement to the EZVIZ Doorbell, this Chime keeps you notified at home when you don't have the smartphone at hand.



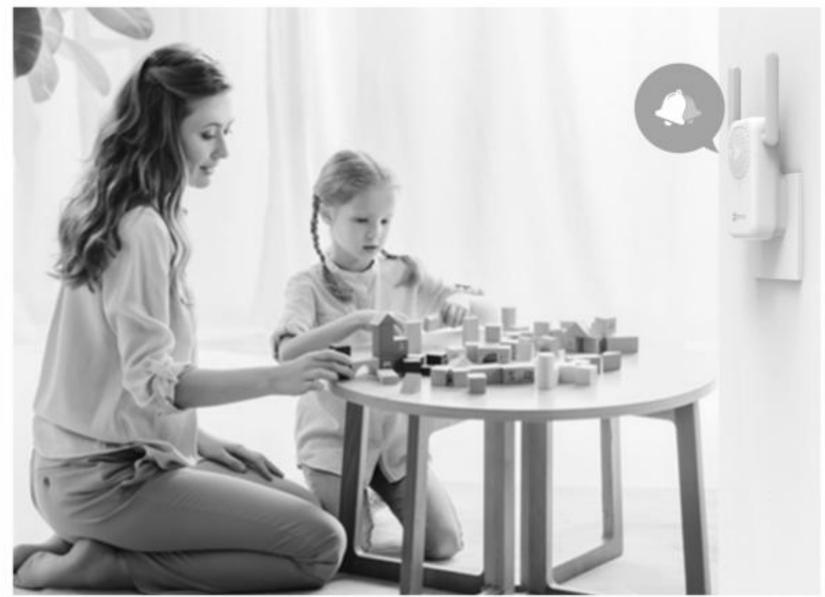

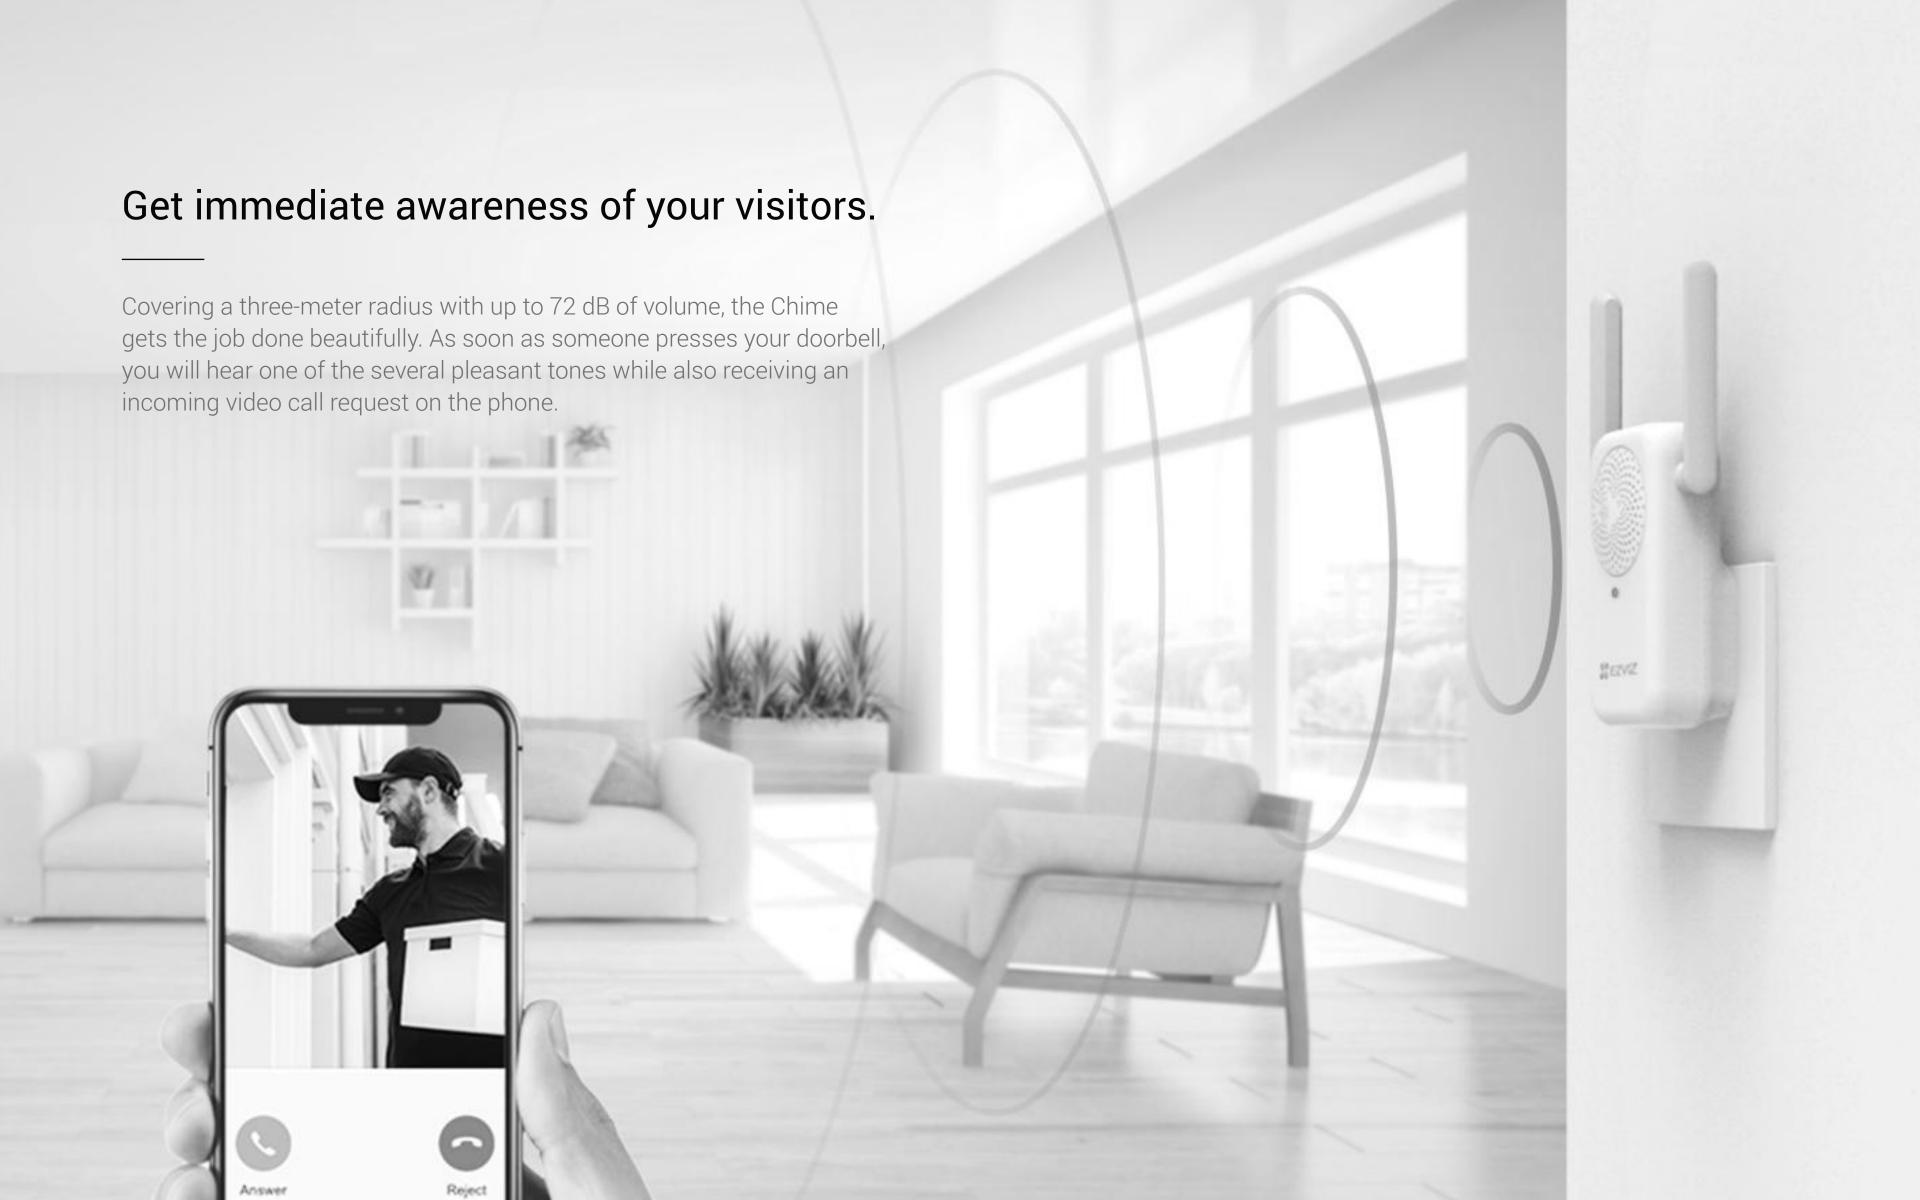


### 20 pleasant ringtones to choose from.

Choose your favorite ringtone to suit your unique aesthetic. Or, mute the chime when you don't want to be disturbed.



### Dual antennas for real-time response.

The Chime has two external antennas, so you don't have to worry about the network stability of your front-door security system.

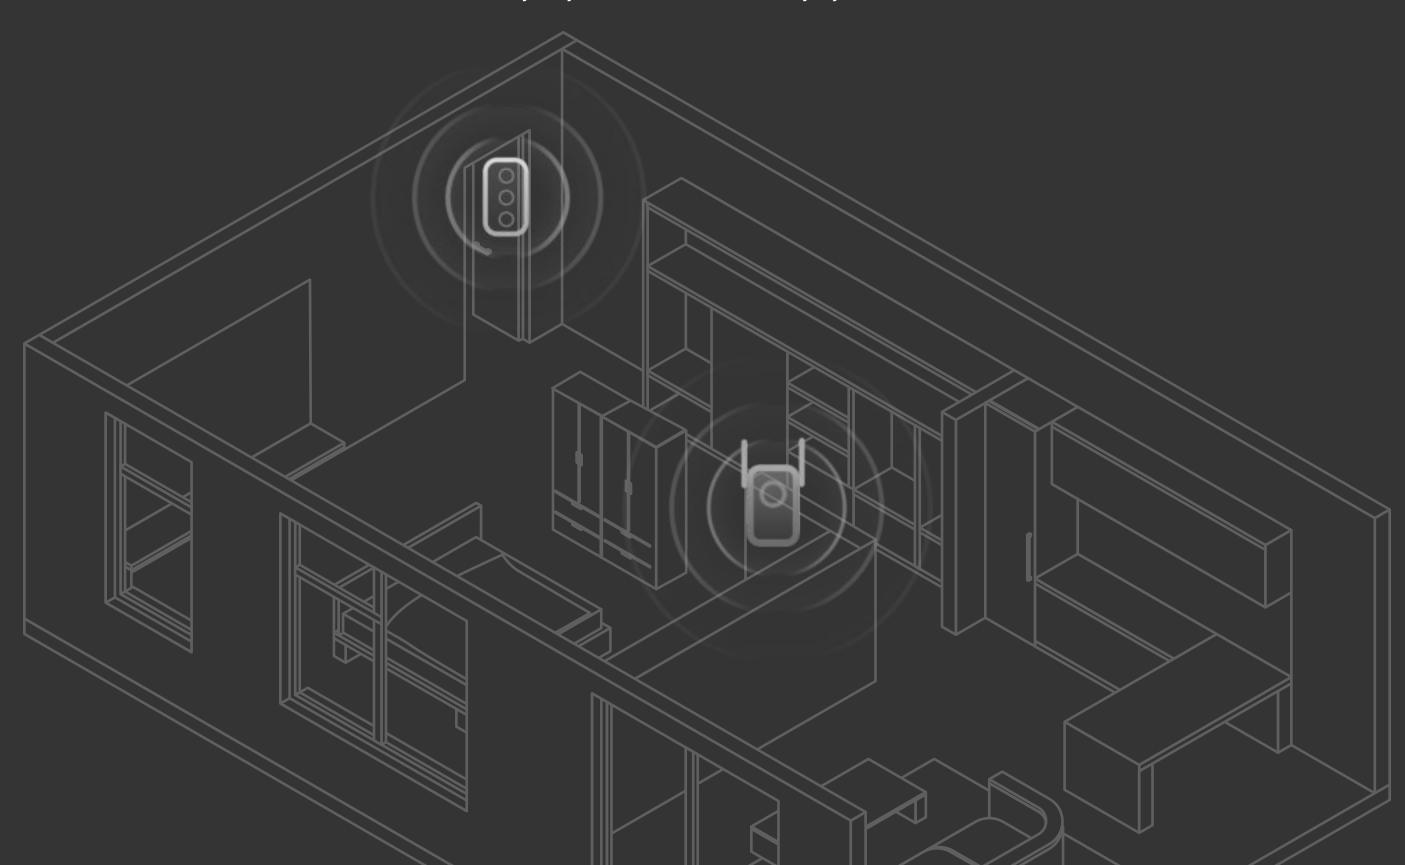

### Specifications cs-cmt-chime

#### Network

Protocol EZVIZ cloud proprietary protocol

Interface Protocol EZVIZ cloud proprietary protocol

#### Interface

Storage No

Wired Network Does not support

Power Supply Interface EU/US/UK Standard Plug

#### Wi-Fi

Wi-Fi Standard IEEE802.11b / g / n

Frequency Range 2.4 GHz ~ 2.4835 GHz

Channel Bandwidth Supports 20 MHz

Security 64/128-bit WEP, WPA / WPA2, WPA-PSK / WPA2-PSK

Transmission Rate 11b: 11Mbps, 11g: 54Mbps, 11n: 144Mbps

Antennas Dual External Antennas

#### General

Operating Conditions Temperature: -10°C to 40°C (14°F to 104 °F),

Humidity: 95% or less (non-condensing)

Power Supply 100V - 220V AC

Power Consumption Max 0.6W

Dimension  $100 \times 55 \times 35 \text{ mm} (3.94 \times 2.17 \times 1.38 \text{ inch})$ 

Weight 120 g (4.23 oz)

### In the box:

### Certifications:

-Chime

UL / FCC / CE / WEEE / REACH / RoHS

-Quick Start Guide