

DS-3E0505P-E 4-Port Gigabit Unmanaged PoE Switch

DS-3E0505P-E switches are layer 2 Gigabit unmanaged PoE switches, providing 4 Gigabit PoE ports, and one 10/100/1000 Mbps RJ45 port. The switches provide advanced PoE technology and connect other devices with high performance. Meanwhile, all Gigabit ports guarantee stable transmission of data.



Feature and Function

- 4 × Gigabit PoE ports, and 1 × Gigabit RJ45 port.
- IEEE 802.3at/af standard.
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, and IEEE 802.3z standard.
- 6 KV surge protection for PoE ports.
- PoE power management.
- Gigabit network access.
- Wire-speed forwarding and non-blocking design.
- Store-and-forward switching.
- Solid high-strength metal shell.
- Reliable fan-free design.




Specification

Model		DS-3E0505P-E
Network parameters	Port number	4 × Gigabit PoE ports, and 1 × Gigabit RJ45 port
	Port type	RJ45 port, full duplex, MDI/MDI-X adaptive
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, IEEE 802.3z
	Forwarding mode	Store-and-forward switching
	MAC address table	2 K
	Switching capacity	10 Gbps
	Packet forwarding rate	7.44 Mpps
	Internal cache	1 Mbits
PoE power supply	PoE standard	IEEE 802.3af, IEEE 802.3at
	PoE power pin	Support 4-core power supply, and Ethernet cable 1/2/3/6 provide power supply.
	PoE port	Ports 1 to 4
	Max. port power	30 W
	PoE power budget	60 W
	Max. power consumption	65 W
General	Shell	Metal material, fan-free design
	Gross weight	0.84 kg (1.85 lb)
	Net weight	0.26 kg (0.57 lb)
	Dimension (L × H × D)	105 mm × 27.6 mm × 83.1 mm (4.1" × 1.1" × 3.3")
	Operating temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Storage temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating humidity	5% to 95% (no condensation)
	Storage humidity	5% to 95% (no condensation)
	Power supply	48 VDC, 1.35 A
	Power consumption in idle	5 W

Physical Interface

Front panel:

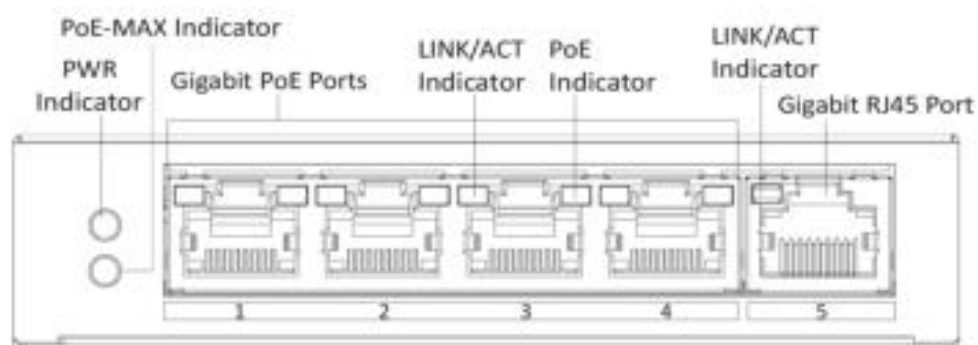


Back panel:




Available Model

- DS-3E0505P-E


Dimension (unit: mm)

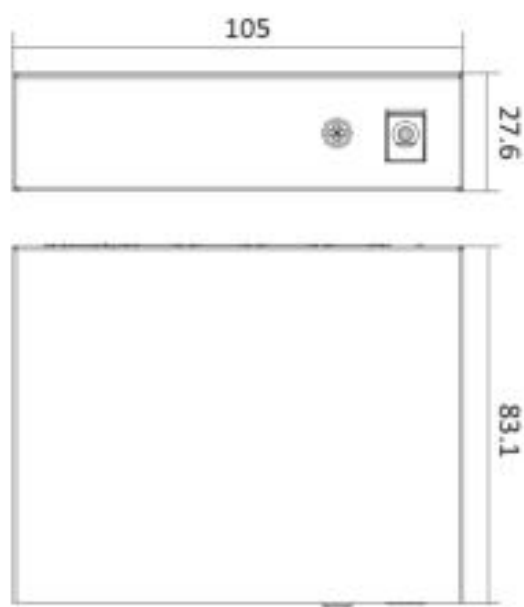

Typical Application

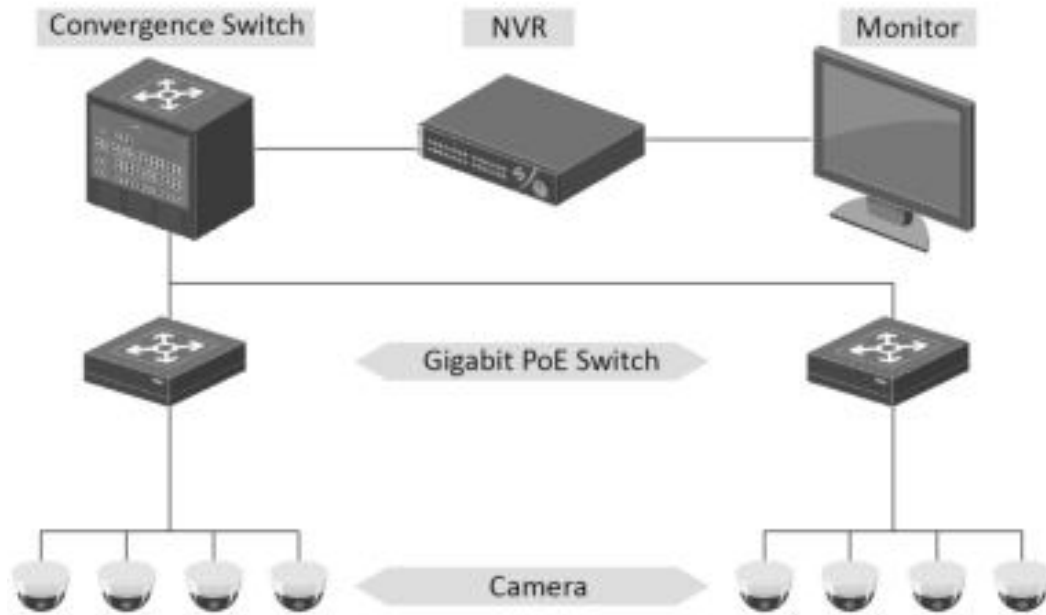

Distributed by

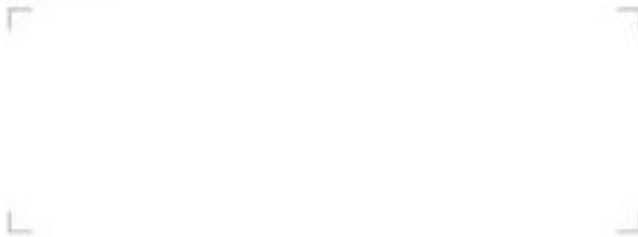

HIKVISION®

Headquarters

No.555 Qiantuo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseas@business@hikvision.com

HIKVISION USA
T +1-909-895-0400
sales.usa@hikvision.com

HIKVISION Australia
T +61-2-8599-4233
salesau@hikvision.com

HIKVISION India
T +91-22-29469900
sales@pmahikvision.com

HIKVISION Canada
T +1-800-200-6090
sales.canada@hikvision.com

HIKVISION Thailand
T +662-275-9849
sales.thailand@hikvision.com

HIKVISION Europe
T +31-23-5542770
sales.eu@hikvision.com

HIKVISION Italy
T +39-0438-6902
info.it@hikvision.com

HIKVISION Brazil
T +55-11-3318-0050
latam.support@hikvision.com

HIKVISION Turkey
T +90-216521-7070-7074
sales.tr@hikvision.com

HIKVISION Malaysia
T +601-7652-2413
sales.my@hikvision.com

HIKVISION UK & Ireland
T +01628-902140
sales.uk@hikvision.com

HIKVISION South Africa
Tel: +27 (0)11 0351172
sales.africa@hikvision.com

HIKVISION France
T +33011-85-330-450
info.fr@hikvision.com

HIKVISION Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

HIKVISION Vietnam
T +84-974270888
sales.vt@hikvision.com

HIKVISION UAE
T +971-4-4432090
salesmea@hikvision.com

HIKVISION Singapore
T +65-6884-6718
sg@hikvision.com

HIKVISION Spain
T +34-91-737-35-55
info.es@hikvision.com

HIKVISION Tashkent
T +99-67-1238-9438
uzb@hikvision.ru

HIKVISION Hong Kong
T +852-2151-1701
info.hk@hikvision.com

HIKVISION Russia
T +7-495-609-67-99
saleru@hikvision.com

HIKVISION Korea
T +82-0131-731-8617
sales.korea@hikvision.com

HIKVISION Poland
T +48-22-460-01-50
info.pl@hikvision.com

HIKVISION Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

HIKVISION Colombia
sales.colombia@hikvision.com